

---

*Research article*

## **Comparative Analysis of QoS of Load Balancing Network Using Equal Cost Multi Path And Per Connection Classifier Methods**

**Sukirwan Buton<sup>1</sup>, Saiful Do Abdullah<sup>2</sup>, Seh Turuy<sup>3</sup>**

<sup>1,2,3</sup> Department of Informatics, Faculty of Engineering, Universitas Khairun, Ternate 97728, Indonesia

\* **Correspondence:** Email: [saiful.abdullah@unkhair.ac.id](mailto:saiful.abdullah@unkhair.ac.id)

**Abstract:** High user traffic and suboptimal network management often result in slow internet performance. This study compares the Quality of Service (QoS) of Equal Cost Multi Path (ECMP) and Per Connection Classifier (PCC) load balancing methods at the Engineering Faculty Laboratory, Universitas Khairun. Using the Network Development Life Cycle (NDLC) framework, the implementation utilized a Mikrotik RB450GX4 router connected to two ISPs (Astinet and Indihome). Performance was evaluated based on throughput, delay, jitter, and traffic stability. Results demonstrate that both methods significantly improve network stability. Specifically, PCC excels in connection consistency and balanced traffic distribution based on address classification. Conversely, ECMP offers a simpler configuration with robust failover support. Ultimately, implementing these load balancing techniques enhances overall network service quality, providing an effective solution for managing multi-ISP environments in academic institutions.

**Keywords:** Load Balancing, ECMP, PCC, QoS

---

### **1. Introduction**

The rapid advancement of information and communication technology has driven an increased demand for reliable and high-quality network services. As the number of internet users and web-based applications grows, the need for substantial bandwidth and stable connections has become crucial for both organizations and internet service providers [1]. However, bandwidth limitations and network capacity constraints often pose obstacles to delivering optimal service to users.

One solution to address these issues is the implementation of load balancing technology within computer networks [2]. Load balancing is a technique for distributing network traffic load evenly across multiple available connection paths or links. This approach enhances bandwidth utilization, reduces response time, and improves overall system reliability [3]. By applying load balancing, organizations can maximize existing network resources and deliver better Quality of Service (QoS) to users.

Quality of Service (QoS) serves as a critical parameter in assessing network service quality [4]. QoS measures various aspects of network performance, such as throughput, delay, packet loss, and jitter,

which directly influence the user experience when accessing network services [5]. Proper implementation of load balancing is expected to enhance these QoS parameters, thereby providing a superior experience for end-users.

Various load balancing methods can be implemented in computer networks, including Equal Cost Multi-Path (ECMP) and Per Connection Classifier (PCC) [6]. The ECMP method operates by distributing network traffic evenly based on routing tables that share equal costs to the same destination [7]. ECMP utilizes a hash algorithm to determine which path each data packet will take, ensuring that packets originating from the same source and headed to the same destination consistently utilize the same path [8].

Conversely, the Per Connection Classifier (PCC) method performs load balancing by classifying connections based on a combination of source address, destination address, source port, and destination port [9]. PCC ensures that all packets belonging to the same connection traverse the same gateway, thereby maintaining connection integrity and preventing asymmetric routing issues [10]. The PCC method is claimed to be more effective in handling connections requiring persistence, such as video streaming, VoIP, and other real-time applications.

Several prior studies have examined the implementation of load balancing in computer networks. Research indicates that implementing load balancing can increase throughput by up to 80% compared to a single link connection [11]. Another study revealed that selecting the appropriate load balancing method significantly influences network performance, particularly regarding traffic distribution and connection stability [12].

However, limitations remain within these studies, particularly regarding a comprehensive direct comparison between ECMP and PCC methods concerning QoS parameters [13]. Most research has focused either on a single specific method or measured only a few QoS parameters, thus failing to provide a complete picture of the comparative performance of both methods under various network traffic conditions.

Furthermore, the increasingly diverse characteristics of modern internet traffic—driven by multimedia applications, cloud computing, and the Internet of Things (IoT)—require a deeper analysis of the effectiveness of each load balancing method in handling different traffic types [14]. The distinct working mechanisms of ECMP and PCC are predicted to have varying impacts on QoS, depending on the characteristics and patterns of the traffic traversing the network.

Based on these issues, research providing a comprehensive comparative analysis between ECMP and PCC methods in load balancing implementation is necessary, specifically regarding QoS parameters such as throughput, delay, packet loss, and jitter. This study is expected to contribute to the selection of the most suitable load balancing method for implementation within the network of the Informatics Engineering Study Program at Khairun University, tailored to its specific traffic characteristics, thereby optimizing overall network service quality [15].

## **2. Method**

### **2.1 System Development Method**

The proposed system development method is shown in Figure 1. Meanwhile, the PER CONNECTION CLASSIFIER (PCC) Load Balancing Packet Delivery Process is shown in Figure 2 and

the EQUAL COST MULTI PATH (ECMP) Load Balancing Packet Delivery Process is shown in Figure 3.


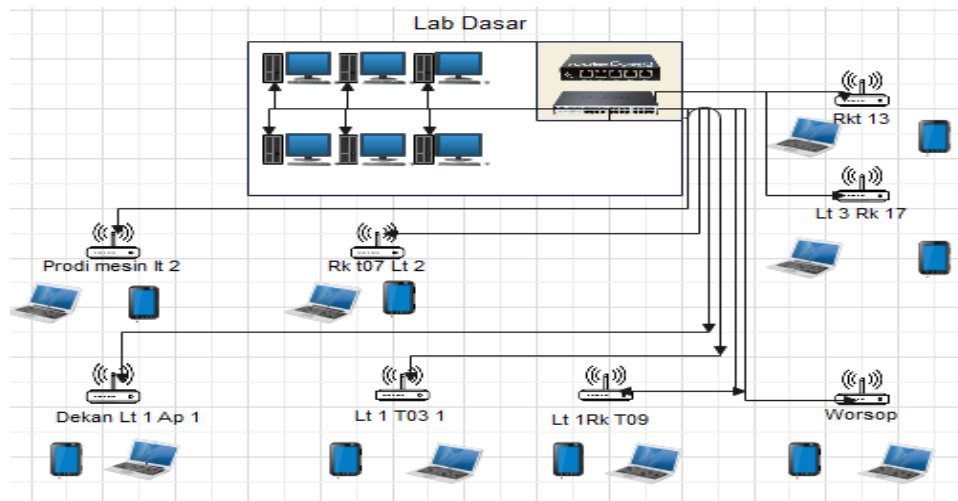


Figure 1. Network Topology with Load Balancing

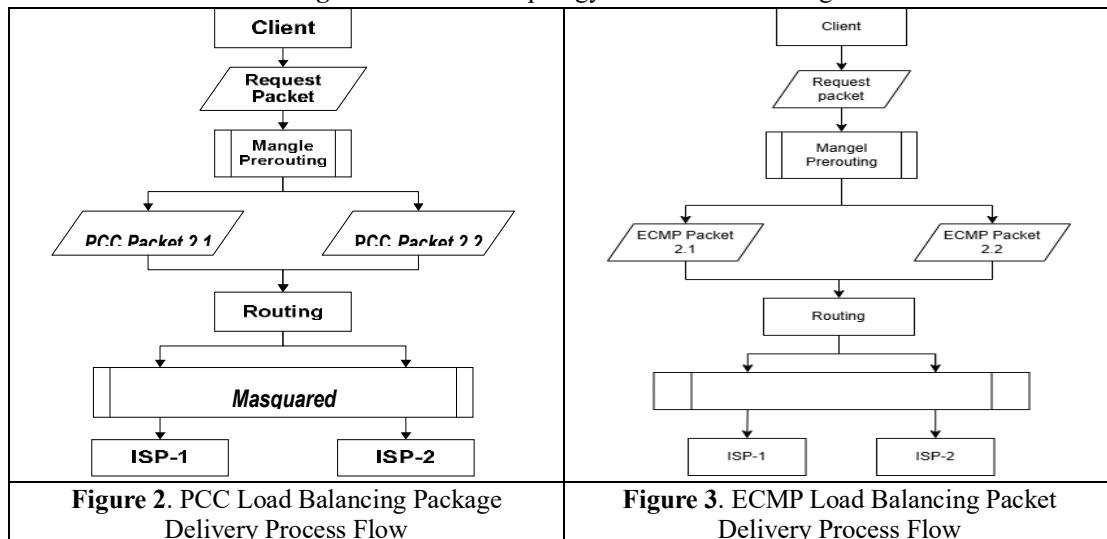

After all simulation stages have been successfully completed, the next step is the implementation stage. This stage refers to the design stages that have been created and simulated. The following are the processes carried out during the implementation stage.

### 2.2 Mikrotik Interface Initialization

Interface initialization is useful to make it easier for authors to develop systems by giving names to each interface according to its function.

```

/interface Ethernet
set numbers="" comment="" disabled=no name="ether1-Astinet"
set numbers="" comment="" disabled=no name="ether2-Indibiz"
set numbers="" comment="" disabled=no name="LAN"
    
```

The "set" command configures the ether1 interface on the MikroTik router. This command activates the interface and names it ether1-Astinet. The same applies to the subsequent commands.

## 2.3 Assigning IP Addresses

At this stage, IP addresses will be assigned to each existing interface, both on the modem router, Mikrotik and from the client side on Mikrotik.

```
/ip address
    add address=192.168.1.20/24 network=192.168.1.0 \ broadcast=192.168.1.255
    comment="LB By-ISP1" \ disabled=no interface=ether2-Astinet
    add address=10.80.30.2/30 network=10.80.30.0 \ broadcast=10.80.30.3 comment="LB
    By-ISP1" disabled=no interface=ether3-Indibiz
    add address=192.168.12.1/24 network=192.168.12.0 \ broadcast=192.168.12.255
    comment="LB By-ISP1" \ disabled=no interface=bridge1-LAN
```

The first line means ordering to provide the ISP-1 interface with the IP address 192.168.1.20 with subnetting /24, namely 255.255.255.0, as well as the description of the following commands.

## 2.4 Mangle Configuration

### a. PCC Load Balancing

In the mangle configuration stage using the PCC load balancing method, the author uses several mangle commands, namely:

1. Chain Prerouting is the process by which the router can manipulate packets before they are routed.
2. Chain Input is the process of inspecting packets entering and processing the router through one of its interfaces.
3. Chain Output is the process of inspecting packets already processed by the router that will be sent out before the routing process.

### b. ECMP Load Balancing

The following are the steps for configuring the MikroTik mangle:

Begin by marking connections originating from outside the network or public interfaces that go to local addresses. This is done by setting connections originating from ISP1 to be marked "cm-ether1-

```
/ip firewall mangle
    add action=mark-connection chain=input in-interface="ether1-Astinet" new-connection-mark="cm-ether2-
    Indibiz" passthrough=yes comment="LB pcc by all"
    add action=mark-connection chain=input in-interface="ether2-Indibiz" new-connection-mark="cm-
    ether1-AstiNet" passthrough=yes comment="LB pcc by all"
```

AstiNet" and connections originating from ISP2 to be marked "cm-ether2-Indibiz". The configuration is as follows:

The next step is to assign routing marks to the path of the marked connection packets that will exit the router. Each connection marked with "cm-ether1-AstiNet" will be assigned the routing mark "to\_ether1-AstiNet" and will be routed through the ISP1 interface. Each connection marked with "cm-ether2-Indibiz" will be assigned the routing mark "to\_ether2-Indibiz" and will be routed through the ISP2 interface. The configuration can be seen in Figure 1.



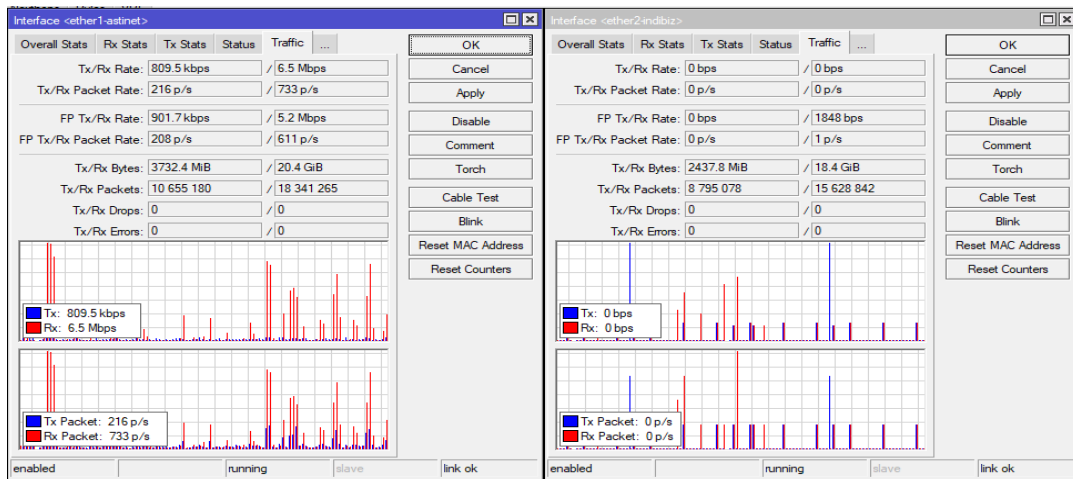


Figure 5. Connection Balance on each ISP Gateway

### 3.4. Load Testing On ISP Gateway

Figure 6 is the result of load testing on the ISP Gateway. There are 2 ISPs tested. The results of each tx, rx value for each ISP are also shown in Figure 7.

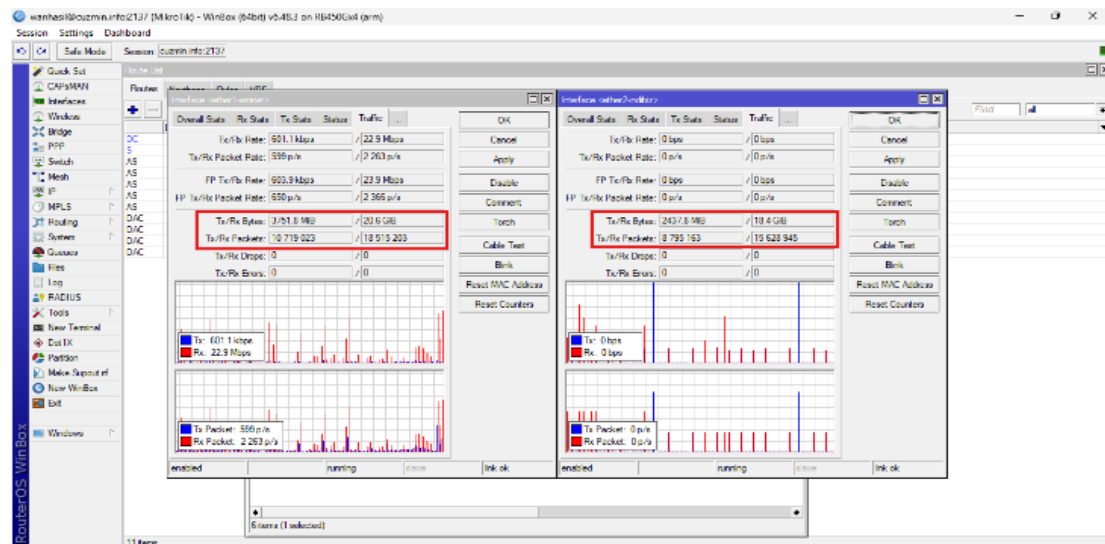
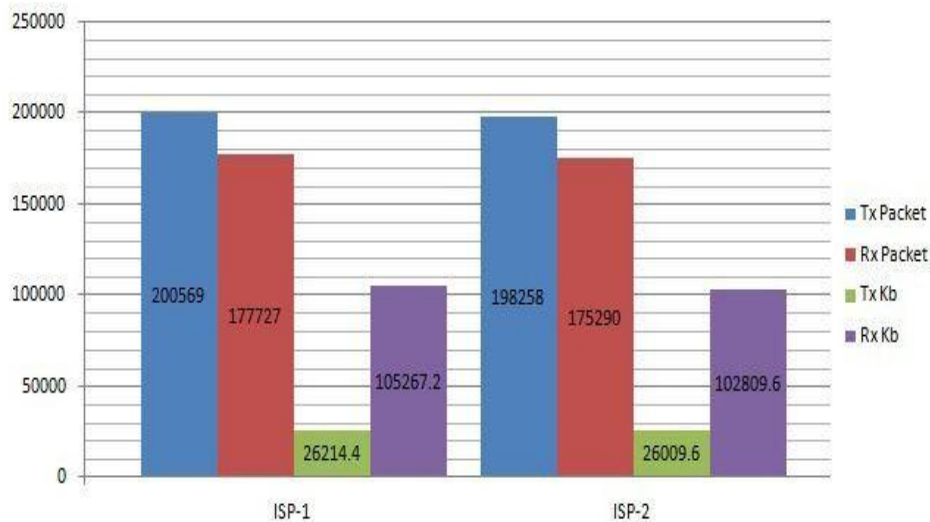


Figure 6. Connection Graph on each ISP Gateway



**Figure 7.** Comparison Diagram of ISP1 and ISP2

#### Analysis of Key Findings

1. **ISP 1's Capacity Dominance:** ISP 1 exhibits a significantly higher traffic load than ISP 2. In terms of Tx, ISP 1's traffic is almost 7.6 times larger than ISP 2's. This indicates that ISP 1 is likely used as a primary route or serves a user segment that is much more active in sending/uploading data.
2. **Upload/Download Ratio Imbalance (Asymmetry)**
  - **ISP 1:** Has a higher Tx than Rx number. This is quite unique because general internet usage is typically higher in Rx (download). This indicates that ISP 1 may be used for seeding, server activities, or data delivery to the central hub (uplink).
  - **ISP 2:** Shows a standard pattern of typical internet users, where Rx (105k) is much higher than Tx (26k). Its download ratio is almost four times its upload ratio.
3. **Traffic Stability:** Looking at the two data sets you provided (row 1 and row 2), both ISPs show slight decreases in the second data set:
  - ISP 1 dropped by about 1.1%.
  - ISP 2 dropped by about 0.8% (for Tx) and 2.3% (for Rx). These decreases are very small and normal, indicating stable network conditions at the time of testing.

#### 3.5. Failover Testing

At this stage, the author tested each load balancer, including the PCC load balancer, to determine the failover performance of the system. The function of failover is to address disconnections or lost connections from one of the ISPs. With this failover, if one of the connection lines from each ISP is lost, the system still has one ISP as a backup source of internet connection. The testing can be seen in Figures 8 and 9.

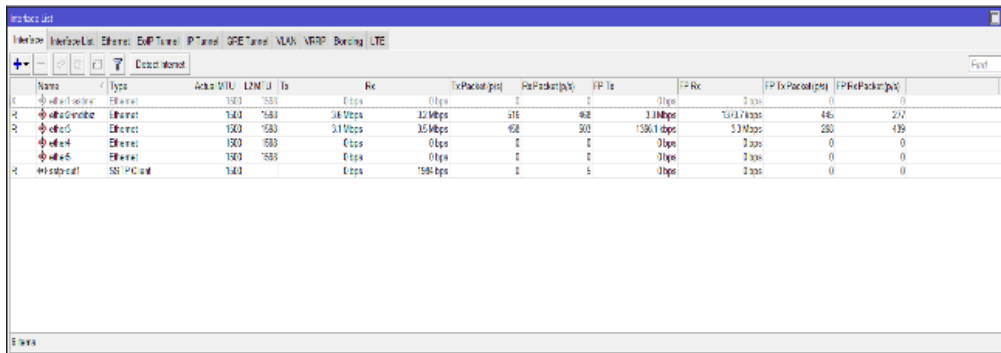


Figure 8. Failover Testing After ISP1 Disconnects

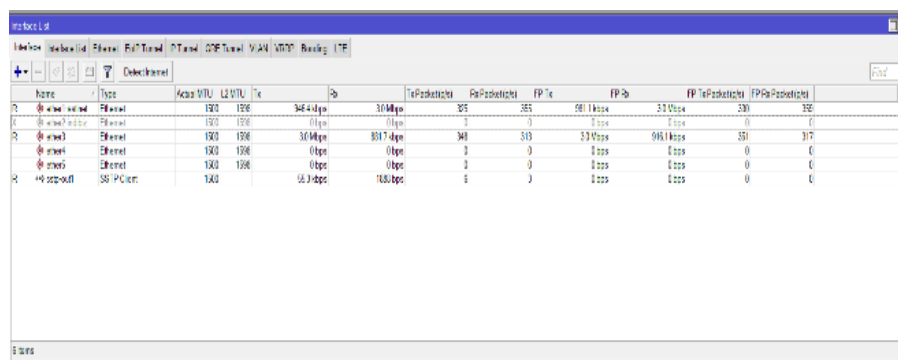


Figure 9. Failover Testing After ISP2 Disconnects

From the test results above, the results obtained are that the download process continues without any connection interruptions because ISP2 will automatically become the default gateway that backs up the overall network performance. This is evident from checking the IP via the IP checker site, www.whatsmyip.com. It can be seen that during the initial download process, it still uses the ISP1 connection path with gateway 192.168.1.1. And after disconnecting from ISP1, the download process continues, but through the ISP2 connection path with gateway 10.80.56.1. can be seen in Figure 10.

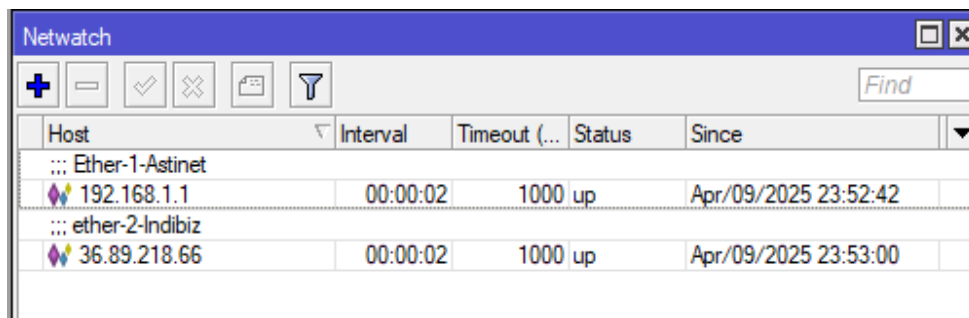


Figure 10. Networkminer Network Up

3.6. Speed Results After Applying PCC and ECMP Methods

The speed results after applying the PCC and ECMP methods can be seen in tables 1 and 2.

Table 1. Speed after applying the PCC method

No	Hari	Throughput	Packet Loss	Delay	Jitter
----	------	------------	-------------	-------	--------

1	Senin	334 k	14,1 k	14,013283 ms	0,185501 ms
2	Selasa	188 k	0,2 k	29,944804 ms	1,310 ms
3	Rabu	146 k	0,3 k	33,238412 ms	5440 ms
4	Kamis	924 k	5,6 k	6,643429 ms	6,760 ms
5	Jumat	386 k	1,5 k	13,742522 ms	9,380 ms

Table 2. Speed after applying the ECMP method

No	Hari	Throughput	Packet Loss	Delay	Jitter
1	Senin	183 k	1,1 k	32,368773 ms	3.420 ms
2	Selasa	760 k	0,8 k	8,104851 ms	1.670 ms
3	Rabu	861 k	0,0 k	8,477976 ms	0,836027 ms
4	Kamis	717 k	0,0 k	10,759078 ms	1.540 ms
5	Jumat	4,7 k	0,0 k	15,204525 ms	2,790 ms

The PCC and ECMP methods were analyzed by monitoring the response time on 10 user PCs using Wireshark with the following QoS parameters: throughput, delay, packet loss, and jitter. The following formula was used:

#### 4. Conclusion

Based on the test results, the implementation of a load balancing system has been proven to significantly improve internet network performance and reliability by efficiently distributing traffic between the two ISPs. The combination of ISP1 and ISP2 not only serves as a failover mechanism, ensuring connection continuity when one link is down, but also optimizes bandwidth utilization by allocating the path based on the size of the requested data packet. Although this system cannot guarantee perfect bandwidth balance due to limitations in response packet identification, the cumulative results show a substantial increase in capacity compared to using either ISP alone.

Technically, the effectiveness of this combination is clearly demonstrated in the test data, where activating both ISPs simultaneously resulted in significantly superior and stable performance, with download rates reaching 22.03 Mbps and upload rates reaching 11.24 Mbps. Compared to using ISP1 alone (10.30 Mbps download) or ISP2 alone (10.18 Mbps download), this combination nearly doubled the download speed while maintaining a low jitter value of 37.00 ms. Thus, the simultaneous configuration of both ISPs is the best solution to obtain network quality that is more resilient to overload and provides a smoother and more scalable connection experience.

#### 5. Reference

- [1]. S. Kumar and R. Singh, "Internet traffic analysis and network performance evaluation in modern computing environment," *IEEE Access*, vol. 9, pp. 145678-145692, 2021.
- [2]. A. Wijaya and B. Santoso, "Load balancing techniques for improving network performance: A comprehensive review," *IEEE Trans. Network Service Manage.*, vol. 18, no. 3, pp. 3245-3260, Sept. 2021.
- [3]. M. Hassan and K. Lee, "Network traffic distribution and load balancing mechanisms in multi-path routing," *IEEE Commun. Surveys Tuts.*, vol. 23, no. 4, pp. 2567-2589, 4th Quart. 2021.
- [4]. R. Chen, Y. Wang, and L. Zhang, "Quality of Service measurement and evaluation in computer networks," *IEEE Trans. Commun.*, vol. 69, no. 8, pp. 5234-5248, Aug. 2021.
- [5]. F. Rahman and T. Nakamura, "QoS parameters analysis for network performance optimization," *IEEE Network*, vol. 35, no. 2, pp. 178-184, Mar./Apr. 2021.

- [6]. J. Park and S. Kim, "Comparative study of load balancing methods in enterprise networks," in *Proc. IEEE Int. Conf. Commun. (ICC)*, Montreal, QC, Canada, 2021, pp. 1-6.
- [7]. D. Thompson and A. Martinez, "Equal Cost Multi Path routing algorithm for traffic engineering," *IEEE/ACM Trans. Netw.*, vol. 29, no. 5, pp. 2156-2169, Oct. 2021.
- [8]. H. Liu, X. Chen, and Z. Wang, "ECMP-based load balancing: Performance analysis and optimization," *IEEE Trans. Parallel Distrib. Syst.*, vol. 32, no. 11, pp. 2678-2691, Nov. 2021.
- [9]. K. Anderson and M. Peterson, "Per connection classifier method for intelligent traffic distribution," in *Proc. IEEE INFOCOM*, Vancouver, BC, Canada, 2021, pp. 234-242.
- [10]. N. Sharma and P. Gupta, "Connection persistence in load balancing: PCC approach," *IEEE Trans. Cloud Comput.*, vol. 9, no. 4, pp. 1456-1468, Oct.-Dec. 2021.
- [11]. Y. Tanaka and H. Suzuki, "Performance improvement through multi-link load balancing implementation," *IEEE Commun. Lett.*, vol. 25, no. 6, pp. 1876-1880, June 2021.
- [12]. E. Rodriguez and C. Silva, "Impact of load balancing strategies on network performance metrics," *IEEE Access*, vol. 9, pp. 98456-98470, 2021.
- [13]. V. Kumar, S. Patel, and R. Jain, "Comparative analysis of routing-based load balancing techniques," in *Proc. IEEE Global Commun. Conf. (GLOBECOM)*, Madrid, Spain, 2021, pp. 1-7.
- [14]. L. Zhang, M. Wang, and J. Liu, "Traffic characterization in modern heterogeneous networks," *IEEE Internet Things J.*, vol. 8, no. 15, pp. 12045-12058, Aug. 2021.
- [15]. T. Yamamoto and K. Watanabe, "Optimization of network QoS through adaptive load balancing mechanisms," *IEEE Trans. Veh. Technol.*, vol. 70, no. 9, pp. 9234-9247, Sept. 2021.



© 2026 the Author(s), licensee BACODING. This is an open access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>)